


Item Number: R17FS15	Description: DIN Female Receptacle	Phase: Production
Revision No.: A	Status: New	Page 1 of 1
Customer Product Number	Created by: L.Z	Approved by: VX
Customer Product Description	Creation Date: 2024.02.29	Approval Date: 2024.02.29

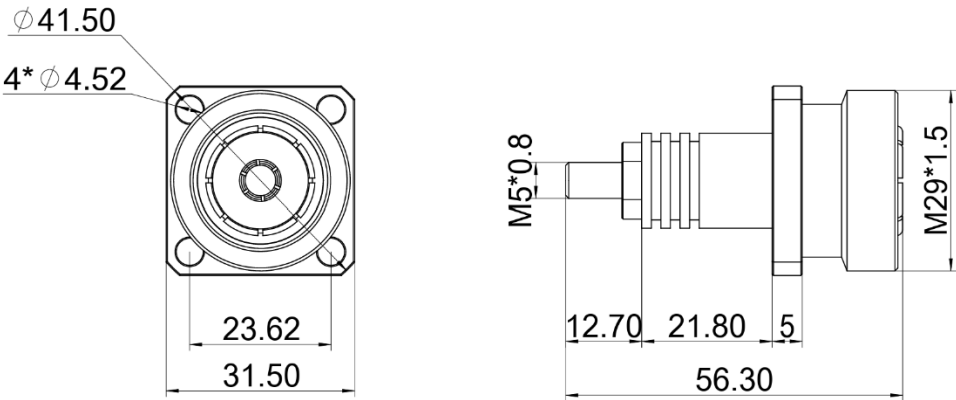

Dimensions are in mm

I . Component Material

Part	Material	Plating	Thickness(um)
Center Pin	Copper Alloy	Gold	Min 0.1
Insulation	PTFE	-	-
Outer Conductor	Brass	Abaloy	3

II . Electrical Parameter

Impedance	50 Ω
Frequency range	DC to 1 GHz
Voltage Rating	3000V
VSWR	Max 1.3
Insulation Resistance	Min 10000Mohm
Insertion Loss (f / GHz):	0.1 x sqrt (f) dB

III. Environment Parameter

Temperature Range:	-20°C ~+80°C
Thermal Shock:	MIL-STD-202
Vibration:	MIL-STD-202
Shock:	MIL-STD-202
Climatic Class:	IEC 60068 55/155/56
RoHS:	Compliant

IV. Mechanical Parameter

Durability:	500 Cycles
Tolerance:	
Machined Surfaces Finish:	1.6 RMS MAX.
Angles $\pm 2^\circ$ Fractions $\pm$ N/A	
Remove All Burrs:	0.15X45 MAX. BREAK
Machine Corners:	0.15X45 D MAX. FILLET
R. Tolerance On Decimals:	.X ± 0.15 .XX ± 0.1